

Kwik-Belt



NORWOOD
Sales Inc.



18 & 22 & 26 Series Conveyor

Features Include:

- 10" x 12 Ga tube w/ 18" 2ply chevron belt (10,000 Bu/hr)
- 12" x 12 Ga tube w/ 22" 2ply chevron belt (14,000 Bu/hr)
- 14" x 12 Ga tube w/ 26" 2ply chevron belt (18,000 Bu/hr)
- Swing away models available in 65' to 125'
- Hydraulic scissor lift on 65' to 125'
- 1-1/2" PEER bearings (18 Series)
- 1-15/16" PEER bearings (22 Series)
- 2-3/16" PEER bearings (26 Series)
- Weather guards standard
- Lengths from 30' to 125'

Drive Options:

- Electric
- Hydraulic
- Gas
- PTO



Up to
18,000
Bushels Per Hour



www.norwoodsales.com 1.800.446.0316

Horace, ND : 701.588.4000 - Cooperstown, ND : 701.797.3684 - Union, NE : 402.263.2100



Transfer Conveyor

Features Include:



- 35" x 77" Collapsible Hopper
- 8" Hopper clearance at front of hopper
- Electric, Hydraulic and Gas Drive available.
- Adjustable discharge height from 28" to 56"

Stainless Steel Conveyor



Features Include:

- 10" x 12 Ga 304 Stainless Steel Tube w/ 18" belt (250 ton/hr)
- 12" x 12 Ga 304 Stainless Steel Tube w/ 22" belt (350 ton/hr)
- 14" x 12 Ga 304 Stainless Steel Tube w/ 26" belt (450 ton/hr)
- 2-ply epoxy and powder coat painted frame
- Collapsible hopper for lower clearance
- Stainless steel shafts on rollers
- PEER stainless steel bearings
- Stainless steel weather guards

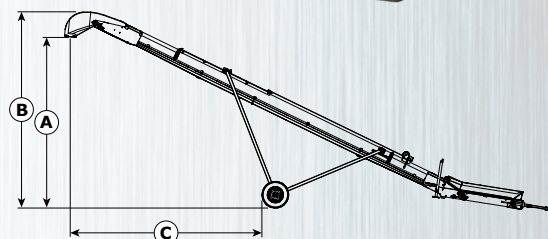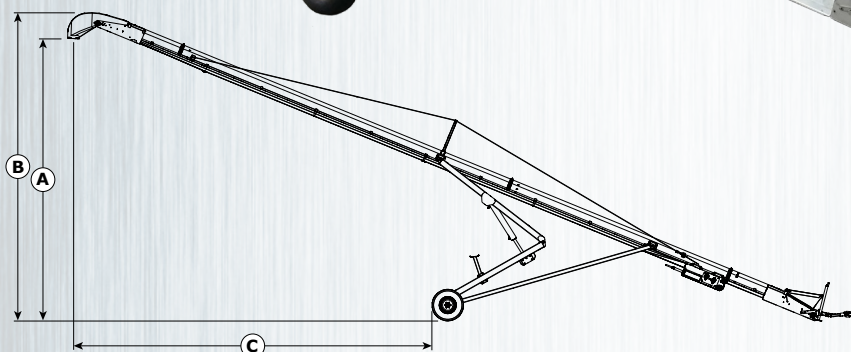

Model			Low Position			High Position			Width	Weight
			A	B	C	A	B	C		
1815 / 2215	TR		2' - 4"	4' - 2"	7' - 2"	4' - 8"	6' - 6"	7' - 2"	3' - 6"	1025 lbs
1838 / 2238	FL		9' - 0"	11' - 3"	17' - 5"	17' - 2"	19' - 3"	15' - 11"	7' - 8"	2105 lbs
1843 / 2243	FL		9' - 4"	11' - 8"	19' - 3"	19' - 9"	21' - 9"	17' - 8"	7' - 8"	2250 lbs
1848 / 2248	FL		10' - 5"	13' - 0"	21' - 8"	22' - 2"	24' - 3"	20' - 5"	7' - 8"	2380 lbs
1830 / 2230	TD		9' - 4"	11' - 7"	12' - 5"	14' - 7"	16' - 7"	11' - 10"	7' - 8"	1680 lbs
1835 / 2235	TD		9' - 8"	12' - 10"	14' - 4"	16' - 10"	18' - 10"	13' - 3"	7' - 8"	1835 lbs
1840 / 2240	TD		10' - 1"	12' - 5"	16' - 10"	19' - 7"	21' - 7"	14' - 10"	7' - 8"	2010 lbs
1845 / 2245	TD		9' - 6"	12' - 0"	19' - 0"	22' - 1"	24' - 1"	17' - 1"	7' - 8"	2175 lbs
1850 / 2250	TD		10' - 4"	12' - 10"	20' - 6"	24' - 7"	26' - 7"	19' - 2"	7' - 8"	2320 lbs
1835 / 2235	SD		10' - 2"	12' - 8"	15' - 2"	16' - 10"	19' - 1"	14' - 1"	7' - 8"	2205 lbs
1840 / 2240	SD		10' - 7"	13' - 1"	17' - 8"	19' - 7"	21' - 7"	15' - 8"	7' - 8"	2380 lbs
1845 / 2245	SD		10' - 8"	13' - 2"	19' - 6"	22' - 1"	24' - 1"	17' - 11"	7' - 8"	2545 lbs
1850 / 2250	SD		10' - 10"	13' - 4"	21' - 4"	24' - 7"	26' - 7"	20' - 0"	7' - 8"	2695 lbs
1855 / 2255	SD		10' - 10"	13' - 4"	22' - 11"	27' - 1"	29' - 1"	22' - 1"	7' - 8"	2840 lbs
1865 / 2265 / 2665	SD		8' - 11"	11' - 7"	32' - 5"	32' - 2"	34' - 1"	28' - 5"	11' - 3"	4430 lbs
1875 / 2275 / 2675	SD		9' - 11"	12' - 7"	40' - 4"	37' - 2"	39' - 1"	34' - 8"	11' - 3"	4715 lbs
1885 / 2285 / 2685	SD		11' - 4"	14' - 1"	44' - 5"	42' - 2"	44' - 1"	44' - 1"	11' - 6"	5970 lbs
1890 / 2290 / 2690	SD		12' - 1"	14' - 10"	49' - 5"	44' - 8"	46' - 7"	42' - 9"	11' - 6"	6080 lbs
18100 / 22100 / 26100	SD		11' - 7"	14' - 4"	51' - 6"	49' - 8"	51' - 7"	43' - 5"	11' - 6"	7350 lbs
18105 / 22105 / 26105	SD		12' - 3"	15' - 0"	56' - 6"	52' - 2"	54' - 1"	47' - 5"	11' - 6"	7455 lbs
22110 / 26110	SD		12' - 10"	17' - 0"	59' - 4"	54' - 10"	56' - 10"	42' - 9"	11' - 6"	9730 lbs
22120 / 26120	SD		13' - 4"	17' - 6"	62' - 2"	59' - 10"	61' - 10"	50' - 10"	11' - 6"	10550 lbs
22125 / 26125	SD		13' - 6"	17' - 6"	66' - 1"	62' - 4"	64' - 4"	54' - 10"	11' - 6"	10850 lbs